

MSA Latchways® 10-ft. Personal Fall Limiter

Personal Fall Limiter—Impressive innovation in a compact size



*Because every life has a **purpose...***

Latchways 10-ft. Personal Fall Limiter


Suitable for multiple applications, the Latchways 10-ft. PFL is designed specifically for environments where close anchorage is available.

Compact and Versatile

The Latchways PFL is the most compact and lightweight personal fall limiter ever developed, using multiple spring radial energy-absorbing technology. This new design eliminates the need for an external energy-absorber outside of the housing, making this unit the most compact 10-ft. PFL on the market.

Reliable and Reassuring

MSA Lifecycle Warranty means that users can work at heights with confidence that the Latchways PFL will continue to provide safety when it matters most. This product offers fall arrest and restraint for users weighing 130 to 400 lbs. (60 to 181 kg) including tools.

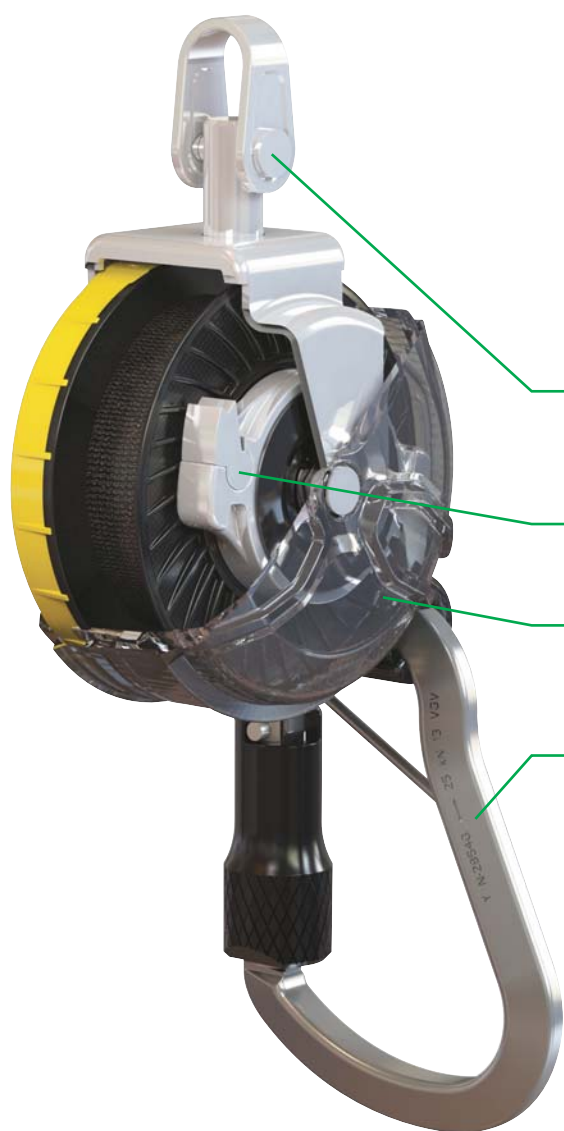

Latchways PFL

The world's first self-retracting lifeline with multiple spring radial energy-absorbing technology

- Integral energy absorber
- Requires zero recalibration or adjustment
- Energy absorber is completely sealed from external contaminants

Free range of motion

- Fully rotating attachment point for complete flexibility—both 360° and 180°

Precision engineering

- Structurally reinforced pawl mechanism

Highly durable


- Polycarbonate case houses the PFL; transparency allows for easy visual inspection of internal components

Superior materials

- Components manufactured from high-grade stainless steel and engineered plastics

Connectors

The Latchways PFL offers a steel top carabiner and a range of available connectors.

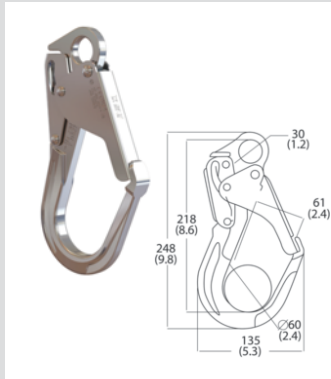

AL36CL Saphook

- Aluminum alloy
- ANSI- and CSA-compliant



36CL Saphook

- High-tensile steel material
- Zinc-plated finish
- ANSI- and CSA-compliant



36CS Saphook

- Double-action/self-locking gate
- High-tensile steel material
- Zinc-plated finish
- ANSI- and CSA-compliant



Aluminum Swivel Carabiner

- Triple-locking gate
- Aluminum alloy
- ANSI- and CSA-compliant

Standards

The Latchways PFL has a highly durable polycarbonate clear casing that allows for easy visual inspection of critical internal components. Unit withstands temperatures ranging from -40° to +129° F (-40° to +54° C). High-performing, high-strength lifeline is manufactured to the highest standard in accordance with MSA's strict quality-control procedures, and meets the following standards:

- ANSI Z359.14 – 2012
- OSHA 1910.66
- OSHA 1926.502
- CSA Z259.2.2-98

Single-leg 10-ft. PFL Ordering Information

Part Number	Web	Cable	Length	Lifeline Connection	PFL Connection	ANSI Z359.14	CSA Z259.2.2
63013-00A	■		10 ft. (3 m)	AL36CL	Steel carabiner	■	■
63013-00C	■		10 ft. (3 m)	Aluminum swivel carabiner	Steel carabiner	■	■
63013-00E	■		10 ft. (3 m)	36CS	Steel carabiner	■	■
63013-00F	■		10 ft. (3 m)	36CL	Steel carabiner	■	■
63203-00A		■	10 ft. (3 m)	36CS	Steel carabiner	■	
63203-00B		■	10 ft. (3 m)	36CL	Steel carabiner	■	
63203-00ACA		■	10 ft. (3 m)	36CS	Steel carabiner		■
63203-00BCA		■	10 ft. (3 m)	36CL	Steel carabiner		■



63013-00A



63013-00C



63013-00E



63013-00F



63203-00A
63203-00ACA



63203-00B
63203-00BCA

Locators & Supplies, Inc
800-950-6666
sales@locatorsandsupplies.com
www.locatorsandsupplies.com

Note: This Bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



MSA – The Safety Company
 1000 Cranberry Woods Drive
 Cranberry Township, PA 16066 USA
 Phone 724-776-8600
www.MSAsafety.com

U.S. Customer Service Center
 Phone 1-800-MSA-2222
 Fax 1-800-967-0398

MSA Canada
 Phone 1-800-672-2222
 Fax 1-800-967-0398

MSA Mexico
 Phone 01 800 672 7222